

# Intel® E7500 Chipset

## Stable Technology for Today's Business Solutions



The Power of  
MACROPROCESSING

### Platform Overview

The Intel® E7500 chipset represents the next step in Intel® server chipset technology. The first in a family of volume chipsets, the Intel E7500 chipset supports dual processor server platforms optimized for the Intel® Xeon™ processor with 512 KB L2 cache and Intel® NetBurst™ microarchitecture. The Intel E7500 chipset design delivers maximized system bus, memory, and I/O bandwidth to enhance performance, scalability, and end-user productivity while providing a smooth transition to the next-generation server technologies.

### Benefits of Advanced Technology and I/O Flexibility


The Intel E7500 chipset utilizes a modular design and offers platform implementation flexibility to meet the expanding needs of dual processor (DP) servers through three core components:

#### The E7500 Memory Controller Hub (MCH)

is the central hub for all data passing through core system elements such as the dual Intel Xeon processors with 512 KB L2 cache via the system bus interface, the memory via memory interface, and both the 64-bit PCI/PCI-X and I/O controller hubs via Intel® Hub Interfaces. The Intel E7500 chipset delivers compelling performance at 3.2 GB/s of bandwidth across the 400 MHz system bus and up to 3.2 GB/s of bandwidth across two high-performance Double Data Rate SDRAM memory channels. To balance the performance offered by the processor and memory interfaces, the MCH allows several high-bandwidth I/O configuration options for a total of 3.2 GB/s of I/O bandwidth. Together, these features deliver balanced, high-throughput system performance for dual processor server platforms.

#### The 82870P2 64-bit PCI/PCI-X Controller Hub 2 (P64H2)

connects to the MCH through a point-to-point Hub Interface 2.0 connection. Up to three P64H2 devices can be attached to the MCH, each providing an I/O bandwidth greater than 1 GB/s for a total of 3.2 GB/s of I/O bandwidth. Each P64H2 contains two independent 64-bit PCI-X interfaces and two PCI hot plug controllers, one per PCI-X

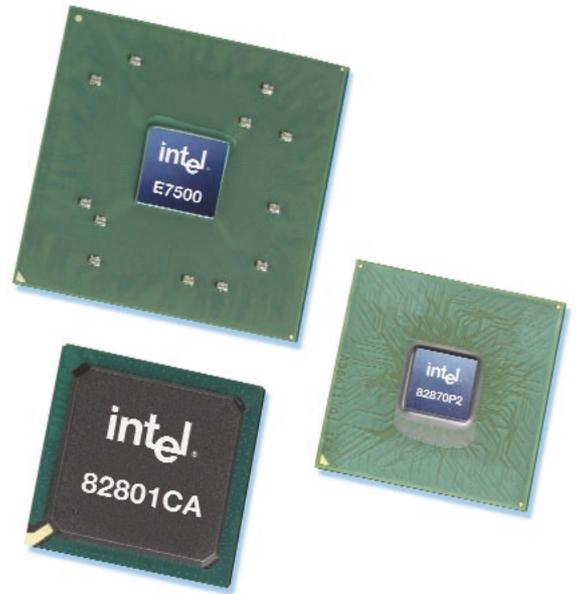

CORE COMPONENTS

SCALEABLE COMPONENT  
FOR I/O BANDWIDTH

interface. Each 64-bit PCI-X segment supports multiple PCI-X slots for high-bandwidth connectivity of next-generation components such as Intel® Gigabit Ethernet adapters and Intel® I/O processors.

#### The 82801CA I/O Controller Hub 3-S

(ICH3-S) connects to the MCH through a point-to-point Hub Interface 1.5 connection. The ICH3-S provides legacy I/O interfaces through integrated features including a two-channel Ultra ATA/100 bus master IDE controller and three USB controllers for up to six USB ports. The ICH3-S also offers an integrated System Manageability Bus 2.0 (SMBus 2.0) controller, an integrated LAN controller, as well as AC97 2.2-compliant and PCI 2.2-compliant interfaces.

### Features that Maximize Performance and Balance the Platform

- Dual Intel Xeon processors with 512 KB L2 cache and a 400 MHz system bus provide up to 3.2 GB/s of available bandwidth.
- Dual DDR-200 memory channels operate in lock-step to provide up to 3.2 GB/s of memory bandwidth.
- Three Hub Interface 2.0 connections provide multiple high-bandwidth I/O configuration options, yielding up to 3.2 GB/s of I/O bandwidth.

## Features

- Supports two Intel® Xeon™ processors with 512 KB L2 cache for dual-processing server platforms

- 400 MHz system bus capability

- Intel® Hub Architecture 2.0 connection to the MCH

- 64-bit PCI/PCI-X Controller Hub-2

- Dual-channel DDR-200 memory interface

- Advanced Platform RASUM

## Benefits

- Delivers a platform that brings Intel® NetBurst™ microarchitecture and Hyper-Threading Technology of the Intel Xeon processor to deliver best-in-class performance for peak server workloads.

- Supports a high-performance, balanced platform by enabling a 3.2 GB/s system bus bandwidth that can support greater memory and I/O bandwidths.

- This point-to-point connection between the MCH and the three P64H2 devices provides greater than 1 GB/s of bandwidth. ECC protection, coupled with high data transfer rates, supports I/O segments with greater reliability and faster access to high-speed networks.

- Introduces next-generation PCI/PCI-X performance and significantly enhances platform flexibility. Two independent 64-bit, 133 MHz PCI-X segments and two hot-plug controllers (one per segment) for each P64H2 allow up to six PCI-X buses per system.

- Offers a maximum memory bandwidth of 3.2 GB/s through a 144-bit wide, 200 MHz Double Data Rate SDRAM memory interface with densities up to 512 megabits.

- Features such as memory ECC with Chipkill\*, hardware memory scrubbing, MCH SMBus target interface, hub interface ECC, and the availability of enhanced error status information maintained through reset yield a more reliable platform.

## Products

- E7500 Memory Controller Hub (MCH)

- 82801CA Integrated Controller Hub (ICH3-S)

- 82870P2 64-bit PCI/PCI-X Controller (P64H2)

## Package

- 1005 Flip Chip-Ball Grid Array (FC-BGA)

- 421 Ball Grid Array (BGA)

- 567 Flip Chip-Ball Grid Array (FC-BGA)

## Intel Access

Products Web Site	<a href="http://www.intel.com/products/server">http://www.intel.com/products/server</a>
Intel® Chipsets Home Page	<a href="http://www.intel.com/products/server/chipsets">http://www.intel.com/products/server/chipsets</a>
Intel® Xeon™ Processor with 512 KB L2 Cache	<a href="http://developer.intel.com/design/xeon">http://developer.intel.com/design/xeon</a>
Intel® Gigabit Ethernet Controllers	<a href="http://developer.intel.com/design/network/products/ethernet/index.htm">http://developer.intel.com/design/network/products/ethernet/index.htm</a>
Intel® I/O Processor	<a href="http://developer.intel.com/design/network/products/ioprocessors/index.htm">http://developer.intel.com/design/network/products/ioprocessors/index.htm</a>
General Information Hotline	(800) 628-8686 or (916) 356-3104 5 a.m. to 5 p.m. PST

Information in this document is provided in connection with Intel products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Intel's Terms and Conditions of Sale for such products, Intel assumes no liability whatsoever, and Intel disclaims any express or implied warranty, relating to sale and/or use of Intel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right. Intel products are not intended for use in medical, life-saving or life-sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

Intel, Xeon, and Intel NetBurst are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and in other countries.

\*Other names and brands may be claimed as the property of others.



For more information, visit the Intel Web site at: <http://developer.intel.com>

**UNITED STATES AND CANADA**  
Intel Corporation  
Robert Noyce Building  
2200 Mission College Blvd.  
P.O. Box 58119  
Santa Clara, CA 95052-8119  
USA

**EUROPE**  
Intel Corporation (UK) Ltd.  
Pipers Way  
Swindon  
Wiltshire SN3 1RJ  
UK

**ASIA-PACIFIC**  
Intel Semiconductor Ltd.  
32/F Two Pacific Place  
88 Queensway, Central  
Hong Kong, SAR

**JAPAN**  
Intel Japan (Tsukuba HQ)  
5-6  
Tokodai Tsukuba-shi  
300-2635 Ibaraki-ken  
Japan

**SOUTH AMERICA**  
Intel Semicondutores do Brasil LTDA  
Av. Dr. Chucuri Zaidan, 940-10° andar  
04583-904 São Paulo, SP  
Brazil