



***Intel[®] IXP42X Product Line of
Network Processors and IXC1100
Control Plane Processor:
Spread-Spectrum Clocking to
Reduce EMI***

Application Note

July 2004



INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO SALE AND/OR USE OF INTEL PRODUCTS, INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT.

Intel Corporation may have patents or pending patent applications, trademarks, copyrights, or other intellectual property rights that relate to the presented subject matter. The furnishing of documents and other materials and information does not provide any license, express or implied, by estoppel or otherwise, to any such patents, trademarks, copyrights, or other intellectual property rights.

Intel products are not intended for use in medical, life saving, life sustaining, critical control or safety systems, or in nuclear facility applications.

Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

The Intel® IXP42X Product Line of Network Processors and IXC1100 Control Plane Processor may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an ordering number and are referenced in this document, or other Intel literature may be obtained by calling 1-800-548-4725 or by visiting Intel's website at <http://www.intel.com>.

BunnyPeople, Celeron, Chips, Dialogic, EtherExpress, ETOX, FlashFile, i386, i486, i960, iCOMP, InstantIP, Intel, Intel Centrino, Intel Centrino logo, Intel logo, Intel386, Intel486, Intel740, IntelDX2, IntelDX4, IntelSX2, Intel Inside, Intel Inside logo, Intel NetBurst, Intel NetMerge, Intel NetStructure, Intel SingleDriver, Intel SpeedStep, Intel StrataFlash, Intel Xeon, Intel XScale, IPLink, Itanium, MCS, MMX, MMX logo, Optimizer logo, OverDrive, Paragon, PDCharm, Pentium, Pentium II Xeon, Pentium III Xeon, Performance at Your Command, Sound Mark, The Computer Inside, The Journey Inside, VTune, and Xircom are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

*Other names and brands may be claimed as the property of others.

Copyright © 2004, Intel Corporation

Contents

- 1.0 Overview..... 5
- 2.0 Clocks and Spread-Spectrum Clocking..... 5
 - 2.1 Clocks 5
 - 2.2 Spread-Spectrum Clocking..... 6
 - 2.3 USB Clocking Considerations..... 7
- 3.0 Summary 7

Figures

- 1 Clock-Generation Scheme..... 6

Tables

- 1 Spread-Spectrum Clocking Parameters for Processors 7

Revision History

Date	Revision	Description
July 2004	002	Updated Intel® product branding.
September 2003	001	Initial release of this document.

1.0 Overview

Electromagnetic interference (EMI) is a concern for board designers. The United States and other countries regulate the amount of EMI an electronic device may emit to ensure that electronic devices do not interfere with each other.

Because the Intel® IXP42X Product Line of Network Processors and IXC1100 Control Plane Processor typically go into consumer or residential applications, the Federal Communications Commission (FCC) regulations, regarding EMI, are more stringent. The FCC's Class A regulations pertain to industrial applications and Class B applies to residential or consumer applications. Hardware engineers designing with the IXP42X product line and IXC1100 control plane processors are often concerned with passing FCC Class-B regulations.

Many techniques are employed by engineers to reduce EMI. The first and most-effective method is board-layout techniques. With the proper care put into the board layout and termination, a hardware engineer can generally avoid further measures.

A hardware engineer may choose to use shielding in the box. This solution, however, is very expensive — particularly for high-volume products.

Another, popular technique is called “spread-spectrum clocking.” By “spreading” the frequency slightly, the energy is spread out as well. This reduces the maximum peak energy seen, when measuring EMI. The total amount of energy is the same, but the peak values are reduced.

Since FCC Class A and Class B regulations concern the “peak” energy emissions, the spread-spectrum-clocking solution helps products meet FCC regulations.

This approach doesn't *guarantee* — in and of itself — that a board will meet FCC requirements, but spread-spectrum clocking is one of the techniques that a board designer can use to help meet those regulations.

Spread-spectrum clocking requires a special, spread-spectrum oscillator — that is more costly than an inexpensive crystal. But, the clocking technique may eliminate the need for more-expensive shielding — which more than offsets the cost of an oscillator.

Of the three discussed solutions to the EMI issue, the best one, obviously, is proper board design and layout.

2.0 Clocks and Spread-Spectrum Clocking


2.1 Clocks

In the IXP42X product line and IXC1100 control plane processors, all of the internal system clocks — and several of the external interface clocks — are generated by a Phase-Locked Loop (PLL) that is synchronized to an external reference clock. The external reference clock can be generated by a crystal oscillator or can be supplied directly from a clock generator.

The IXP42X product line and IXC1100 control plane processors' specification on the input clock is 33.33 MHz +/- 50 ppm.

The clock generation scheme is shown in [Figure 1](#).

Figure 1. Clock-Generation Scheme

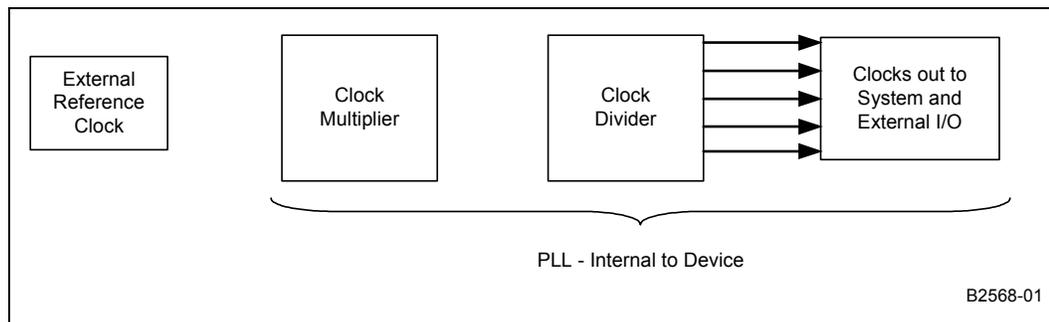

The Clock Multiplier is used to generate a high-frequency clock that is a common multiple for all internally generated clocks. This clock is divided down to produce the system and I/O clocks required by the device.

Since the clock multiplication and division is a linear operation, any change to the external reference clock period is directly translated to change in the output clock periods. (For example, a 1% change in external reference clock period creates a 1% change in the internally generated clock periods.)

This effect will be observed on any interface in which the IXP42X product line and IXC1100 control plane processors generate the clock for the interface.

Some interfaces have very tight specifications on the I/O clock and data transmission. If the external reference clock period is not within the specified range, it is up to the customer to ensure that the interfaces are operating within specifications.

These interfaces all run off of clocks generated internally:

- SDRAM
- GPIO clocks generated for external systems
- HSS - This interface generates a configurable clock that is divided down from the internal clock.
- UART(s)
- MDIO interface
- USB

Note: If you are using the spread-spectrum solution, *do not* use the USB interface. (See “USB Clocking Considerations” on page 7.)

2.2 Spread-Spectrum Clocking

Using a spread-spectrum clock generator, with the IXP42X product line and IXC1100 control plane processors, can help reduce EMI. In implementing this solution, however, the peripheral clocks need to be taken into account.

To ensure proper operation of the device, do not exceed the parameters in [Table 1](#).



Table 1. Spread-Spectrum Clocking Parameters for Processors

Spread-Spectrum Conditions	Min	Max	Notes
Frequency deviation from 33.33 MHz as a percent.	-2.0%	+0.0%	Characterized and guaranteed by design, but not tested. Do not over-clock the PLL input. The A.C. timings will not be guaranteed if the device exceeds 33.33 MHz.
Modulation frequency		50 KHz	Characterized and guaranteed by design, but not tested

2.3 USB Clocking Considerations

The USB is very sensitive to clock deviations. The USB-1.1 specification lists a tolerance of 500 ppm or 0.05%.

If the clock deviates from the 33.33-MHz frequency, the USB is not be guaranteed to work correctly.

Therefore, if you choose to do spread-spectrum clocking in your design, *do not use* the USB.

3.0 Summary

Since the IXP42X product line and IXC1100 control plane processors often go into consumer electronics, strict EMI regulations must be met. One of the techniques that can help meet these requirements is spread-spectrum clocking.



This page is intentionally left blank.