



Intel® Desktop Board D945GNT Technical Product Specification

May 2005

Order Number: D14069-001US

The Intel® Desktop Board D945GNT may contain design defects or errors known as errata that may cause the product to deviate from published specifications. Current characterized errata are documented in the Intel Desktop Board D945GNT Specification Update.

Revision History

Revision	Revision History	Date
-001	First release of the Intel® Desktop Board D945GNT Technical Product Specification.	May 2005

This product specification applies to only the standard Intel Desktop Board D945GNT with BIOS identifier NT94510J.86A.

Changes to this specification will be published in the Intel Desktop Board D945GNT Specification Update before being incorporated into a revision of this document.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. INTEL PRODUCTS ARE NOT INTENDED FOR USE IN MEDICAL, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS.

All Intel desktop boards are evaluated as Information Technology Equipment (I.T.E.) for use in personal computers (PC) for installation in homes, offices, schools, computer rooms, and similar locations. The suitability of this product for other PC or embedded non-PC applications or other environments, such as medical, industrial, alarm systems, test equipment, etc. may not be supported without further evaluation by Intel.

Intel Corporation may have patents or pending patent applications, trademarks, copyrights, or other intellectual property rights that relate to the presented subject matter. The furnishing of documents and other materials and information does not provide any license, express or implied, by estoppel or otherwise, to any such patents, trademarks, copyrights, or other intellectual property rights.

Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

Intel® desktop boards may contain design defects or errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications before placing your product order.

Copies of documents which have an ordering number and are referenced in this document, or other Intel literature, may be obtained from:

Intel Corporation
P.O. Box 5937
Denver, CO 80217-9808

or call in North America 1-800-548-4725, Europe 44-0-1793-431-155, France 44-0-1793-421-777,
Germany 44-0-1793-421-333, other Countries 708-296-9333.

Intel, Pentium, and Celeron are registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

* Other names and brands may be claimed as the property of others.

Copyright © 2005, Intel Corporation. All rights reserved.

Preface

This Technical Product Specification (TPS) specifies the board layout, components, connectors, power and environmental requirements, and the BIOS for the Intel® Desktop Board D945GNT. It describes the standard product and available manufacturing options.

Intended Audience

The TPS is intended to provide detailed, technical information about the Desktop Board D945GNT and its components to the vendors, system integrators, and other engineers and technicians who need this level of information. It is specifically *not* intended for general audiences.

What This Document Contains

Chapter	Description
1	A description of the hardware used on the Desktop Board D945GNT
2	A map of the resources of the Desktop Board
3	The features supported by the BIOS Setup program
4	A description of the BIOS error messages, beep codes, and POST codes

Typographical Conventions

This section contains information about the conventions used in this specification. Not all of these symbols and abbreviations appear in all specifications of this type.

Notes, Cautions, and Warnings

NOTE

Notes call attention to important information.

4 INTEGRATOR'S NOTES

Integrator's notes are used to call attention to information that may be useful to system integrators.

CAUTION

Cautions are included to help you avoid damaging hardware or losing data.

WARNING

Warnings indicate conditions, which if not observed, can cause personal injury.

Other Common Notation

#	Used after a signal name to identify an active-low signal (such as USBP0#)
(NxnX)	When used in the description of a component, N indicates component type, xn are the relative coordinates of its location on the Desktop Board D945GNT, and X is the instance of the particular part at that general location. For example, J5J1 is a connector, located at 5J. It is the first connector in the 5J area.
GB	Gigabyte (1,073,741,824 bytes)
GB/sec	Gigabytes per second
Gbits/sec	Gigabits per second
KB	Kilobyte (1024 bytes)
Kbit	Kilobit (1024 bits)
kbits/sec	1000 bits per second
MB	Megabyte (1,048,576 bytes)
MB/sec	Megabytes per second
Mbit	Megabit (1,048,576 bits)
Mbit/sec	Megabits per second
xxh	An address or data value ending with a lowercase h indicates a hexadecimal value.
x.x V	Volts. Voltages are DC unless otherwise specified.
*	This symbol is used to indicate third-party brands and names that are the property of their respective owners.

Contents

1 Product Description

1.1	Overview	10
1.1.1	Feature Summary	10
1.1.2	Manufacturing Options	11
1.1.3	Board Layout	12
1.1.4	Block Diagram	14
1.2	Online Support	15
1.3	Processor	15
1.4	System Memory	16
1.4.1	Memory Configurations	17
1.5	Intel® 945G Chipset	21
1.5.1	Intel 945G Graphics Subsystem	21
1.5.2	USB	23
1.5.3	IDE Support	24
1.5.4	Real-Time Clock, CMOS SRAM, and Battery	26
1.6	PCI Express Connectors	26
1.7	IEEE-1394a Connectors (Optional)	26
1.8	Legacy I/O Controller	27
1.8.1	Serial Port	27
1.8.2	Parallel Port	27
1.8.3	Diskette Drive Controller	27
1.8.4	Keyboard and Mouse Interface	27
1.9	Audio Subsystem	28
1.9.1	Audio Subsystem Software	28
1.9.2	Audio Connectors	28
1.9.3	8-Channel (7.1) Audio Subsystem	29
1.9.4	6-Channel (5.1) Audio Subsystem	31
1.10	LAN Subsystem	32
1.10.1	LAN Subsystem Software	32
1.10.2	10/100 Mbps/sec LAN Subsystem	32
1.10.3	Gigabit LAN Subsystem	33
1.10.4	Intel® Active Management Technology (Optional)	34
1.10.5	Alert Standard Format (ASF) Support (Optional)	36
1.11	Hardware Management Subsystem	36
1.11.1	Hardware Monitoring and Fan Control ASIC	37
1.11.2	Chassis Intrusion and Detection	37
1.11.3	Fan Monitoring	37
1.11.4	Thermal Monitoring	38
1.12	Power Management	39
1.12.1	ACPI	39
1.12.2	Hardware Support	41
1.13	Trusted Platform Module (Optional)	45

2 Technical Reference

2.1	Introduction	47
2.2	Memory Resources	47
2.2.1	Addressable Memory.....	47
2.2.2	Memory Map.....	49
2.3	DMA Channels	49
2.4	Fixed I/O Map.....	50
2.5	PCI Configuration Space Map.....	51
2.6	Interrupts	52
2.7	PCI Conventional Interrupt Routing Map	53
2.8	Connectors.....	55
2.8.1	Back Panel Connectors	55
2.8.2	Component-side Connectors.....	58
2.9	Jumper Block	67
2.10	Mechanical Considerations	68
2.10.1	Form Factor	68
2.10.2	I/O Shield.....	69
2.11	Electrical Considerations.....	71
2.11.1	DC Loading.....	71
2.11.2	Add-in Board Considerations.....	71
2.11.3	Fan Connector Current Capability	72
2.11.4	Power Supply Considerations	72
2.12	Thermal Considerations	73
2.13	Reliability.....	75
2.14	Environmental	76
2.15	Regulatory Compliance.....	77
2.15.1	Safety Regulations	77
2.15.2	EMC Regulations.....	77
2.15.3	European Union Declaration of Conformity Statement.....	78
2.15.4	Recycling Considerations	79
2.15.5	Product Certification Markings (Board Level)	80

3 Overview of BIOS Features

3.1	Introduction	81
3.2	BIOS Flash Memory Organization	82
3.3	Resource Configuration	82
3.3.1	PCI Autoconfiguration.....	82
3.3.2	PCI IDE Support	82
3.4	System Management BIOS (SMBIOS)	83
3.5	Legacy USB Support.....	83
3.6	BIOS Updates	84
3.6.1	Language Support	84
3.6.2	Custom Splash Screen	84
3.7	Boot Options	85
3.7.1	CD-ROM Boot	85
3.7.2	Network Boot	85
3.7.3	Booting Without Attached Devices	85
3.7.4	Changing the Default Boot Device During POST	85

3.8	Adjusting Boot Speed.....	86
3.8.1	Peripheral Selection and Configuration.....	86
3.8.2	BIOS Boot Optimizations.....	86
3.9	BIOS Security Features	87

4 Error Messages and Beep Codes

4.1	Speaker	89
4.2	BIOS Beep Codes.....	89
4.3	BIOS Error Messages	89
4.4	Port 80h POST Codes	90

Figures

1.	Board Components	12
2.	Block Diagram.....	14
3.	Memory Channel and DIMM Configuration.....	17
4.	Dual Channel (Interleaved) Mode Configuration with Two DIMMs	18
5.	Dual Channel (Interleaved) Mode Configuration with Three DIMMs.....	18
6.	Dual Channel (Interleaved) Mode Configuration with Four DIMMs.....	19
7.	Single Channel (Asymmetric) Mode Configuration with One DIMM.....	20
8.	Single Channel (Asymmetric) Mode Configuration with Three DIMMs	20
9.	Front/Back Panel Audio Connector Options for 8-Channel (7.1) Audio Subsystem	29
10.	8-channel (7.1) Audio Subsystem Block Diagram.....	30
11.	Front/Back Panel Audio Connector Options for 6-Channel (5.1) Audio Subsystem	31
12.	6-Channel (5.1) Audio Subsystem Block Diagram.....	31
13.	LAN Connector LED Locations	33
14.	LAN Connector LED Locations	34
15.	Thermal Sensors and Fan Connectors	38
16.	Location of the Standby Power Indicator LED	44
17.	Detailed System Memory Address Map.....	48
18.	Back Panel Connectors for 8-Channel (7.1) Audio Subsystem	56
19.	Back Panel Connectors for 6-Channel (5.1) Audio Subsystem	57
20.	Component-side Connectors	58
21.	Connection Diagram for Front Panel Connector.....	64
22.	Connection Diagram for Front Panel USB Connectors.....	66
23.	Connection Diagram for IEEE 1394a Connectors.....	66
24.	Location of the Jumper Block.....	67
25.	Board Dimensions.....	68
26.	I/O Shield Dimensions for Boards with the 8-Channel (7.1) Audio Subsystem.....	69
27.	I/O Shield Dimensions for Boards with the 6-Channel (5.1) Audio Subsystem.....	70
28.	Processor Heatsink for Omni-directional Airflow.....	73
29.	Localized High Temperature Zones	74

Tables

1.	Feature Summary	10
2.	Manufacturing Options.....	11
3.	Board Components Shown in Figure 1	13
4.	Supported Memory Configurations	16
5.	LAN Connector LED States	33

6.	LAN Connector LED States	34
7.	Effects of Pressing the Power Switch	39
8.	Power States and Targeted System Power	40
9.	Wake-up Devices and Events	41
10.	System Memory Map	49
11.	DMA Channels	49
12.	I/O Map	50
13.	PCI Configuration Space Map.....	51
14.	Interrupts	52
15.	PCI Interrupt Routing Map	54
16.	Back Panel Connectors Shown in Figure 18.....	56
17.	Back Panel Connectors Shown in Figure 19.....	57
18.	Component-side Connectors Shown in Figure 20	59
19.	Front Panel Audio Connector.....	60
20.	Chassis Intrusion Connector	60
21.	SCSI Hard Drive Activity LED Connector (Optional)	60
22.	Serial ATA Connectors.....	60
23.	Processor Fan Connector	61
24.	Front and Rear Chassis Fan Connectors.....	61
25.	Auxiliary Fan Connector (optional).....	61
26.	Main Power Connector.....	62
27.	ATX12V Power Connector	62
28.	Auxiliary Front Panel Power/Sleep LED Connector	63
29.	Front Panel Connector	64
30.	States for a One-Color Power LED	65
31.	States for a Two-Color Power LED	65
32.	BIOS Setup Configuration Jumper Settings.....	67
33.	DC Loading Characteristics	71
34.	Fan Connector Current Capability.....	72
35.	Thermal Considerations for Components	75
36.	Environmental Specifications	76
37.	Safety Regulations	77
38.	EMC Regulations	77
39.	Product Certification Markings	80
40.	BIOS Setup Program Menu Bar	82
41.	BIOS Setup Program Function Keys.....	82
42.	Boot Device Menu Options	85
43.	Supervisor and User Password Functions	87
44.	Beep Codes	89
45.	BIOS Error Messages	89
46.	Port 80h POST Code Ranges.....	90
47.	Port 80h POST Codes	91
48.	Typical Port 80h POST Sequence	94

1 Product Description

What This Chapter Contains

1.1	Overview	10
1.2	Online Support	15
1.3	Processor	15
1.4	System Memory	16
1.5	Intel® 945G Chipset	21
1.6	PCI Express Connectors	26
1.7	IEEE-1394a Connectors (Optional)	26
1.8	Legacy I/O Controller	27
1.9	Audio Subsystem	28
1.10	LAN Subsystem	32
1.11	Hardware Management Subsystem	36
1.12	Power Management	39
1.13	Trusted Platform Module (Optional)	45

1.1 Overview

1.1.1 Feature Summary

Table 1 summarizes the major features of the board.

Table 1. Feature Summary

Form Factor	ATX (12.00 inches by 9.60 inches [304.80 millimeters by 243.84 millimeters])
Processor	Support for an Intel® Pentium® 4 processor in an LGA775 socket with a 1066, 800, or 533 MHz system bus
Memory	<ul style="list-style-type: none"> • Four 240-pin DDR2 SDRAM Dual Inline Memory Module (DIMM) sockets • Support for DDR2 667, DDR2 533, or DDR2 400 MHz DIMMs • Support for up to 4 GB of system memory
Chipset	Intel® 945G Chipset, consisting of: <ul style="list-style-type: none"> • Intel® 82945G Graphics Memory Controller Hub (GMCH) • Intel® 82801G I/O Controller Hub (ICH7)
Video	Intel® GMA950 onboard graphics subsystem
Audio	Refer to Table 2 on page 11 for a description of audio subsystem options
Legacy I/O Control	Legacy I/O controller for diskette drive, serial, parallel, and PS/2* ports
USB	Support for USB 2.0 devices
Peripheral Interfaces	<ul style="list-style-type: none"> • Eight USB ports • One serial port • One parallel port • Four Serial ATA interfaces • One Parallel ATA IDE interface with UDMA 33, ATA-66/100 support • One diskette drive interface • PS/2 keyboard and mouse ports
LAN Support	Refer to Table 2 on page 11 for a description of LAN subsystem options.
BIOS	<ul style="list-style-type: none"> • Intel® BIOS (resident in the SPI Flash device) • Support for Advanced Configuration and Power Interface (ACPI), Plug and Play, and SMBIOS
Expansion Capabilities	<ul style="list-style-type: none"> • Four PCI Conventional* bus connectors • Two PCI Express* x1 bus add-in card connectors • One PCI Express x16 bus add-in card connector
Instantly Available PC Technology	<ul style="list-style-type: none"> • Support for PCI Local Bus Specification Revision 2.3 • Support for PCI Express Revision 1.0a • Suspend to RAM support • Wake on PCI, RS-232, front panel, PS/2 devices, and USB ports
Hardware Monitor Subsystem	<ul style="list-style-type: none"> • Hardware monitoring and fan control ASIC • Voltage sense to detect out of range power supply voltages • Thermal sense to detect out of range thermal values • Three fan connectors • Three fan sense inputs used to monitor fan activity • Fan speed control

1.1.2 Manufacturing Options

Table 2 describes the manufacturing options. Not every manufacturing option is available in all marketing channels. Please contact your Intel representative to determine which manufacturing options are available to you.

Table 2. Manufacturing Options

Audio Subsystem	Intel® High Definition Audio subsystem in one of the following configurations: <ul style="list-style-type: none"> 8-channel (7.1) audio subsystem with five analog audio outputs and two S/PDIF digital audio outputs (coaxial and optical) using the Sigmatel* 9223 audio codec 6-channel (5.1) audio subsystem with three analog audio outputs using the Sigmatel 9220 audio codec
Auxiliary fan connector	Additional fan connector for use in larger chassis
IEEE-1394a Interface	IEEE-1394a controller and three IEEE-1394a connectors (one back panel connector, two front-panel connectors)
LAN subsystem	The board provides one of the following: <ul style="list-style-type: none"> Gigabit (10/100/1000 Mbps/sec) LAN subsystem using the Intel® 82573E/82573V/82574V Gigabit Ethernet Controller 10/100 Mbps/sec LAN subsystem using the Intel® 82562GX/82562GZ Platform LAN Connect (PLC) device
SATA RAID	Intel® 82801GR I/O Controller Hub (ICH7-R) for RAID support (levels 0,1, 0+1, and 5) on the SATA interface
SCSI Hard Drive Activity LED Connector	Allows add-in hard drive controllers (SCSI or other) to use the same LED as the onboard IDE controller
Trusted Platform Module (TPM), revision 1.2	A component that enhances platform security

For information about


Available configurations for the board

Refer to

Section 1.2, page 15

1.1.3 Board Layout

Figure 1 shows the location of the major components.

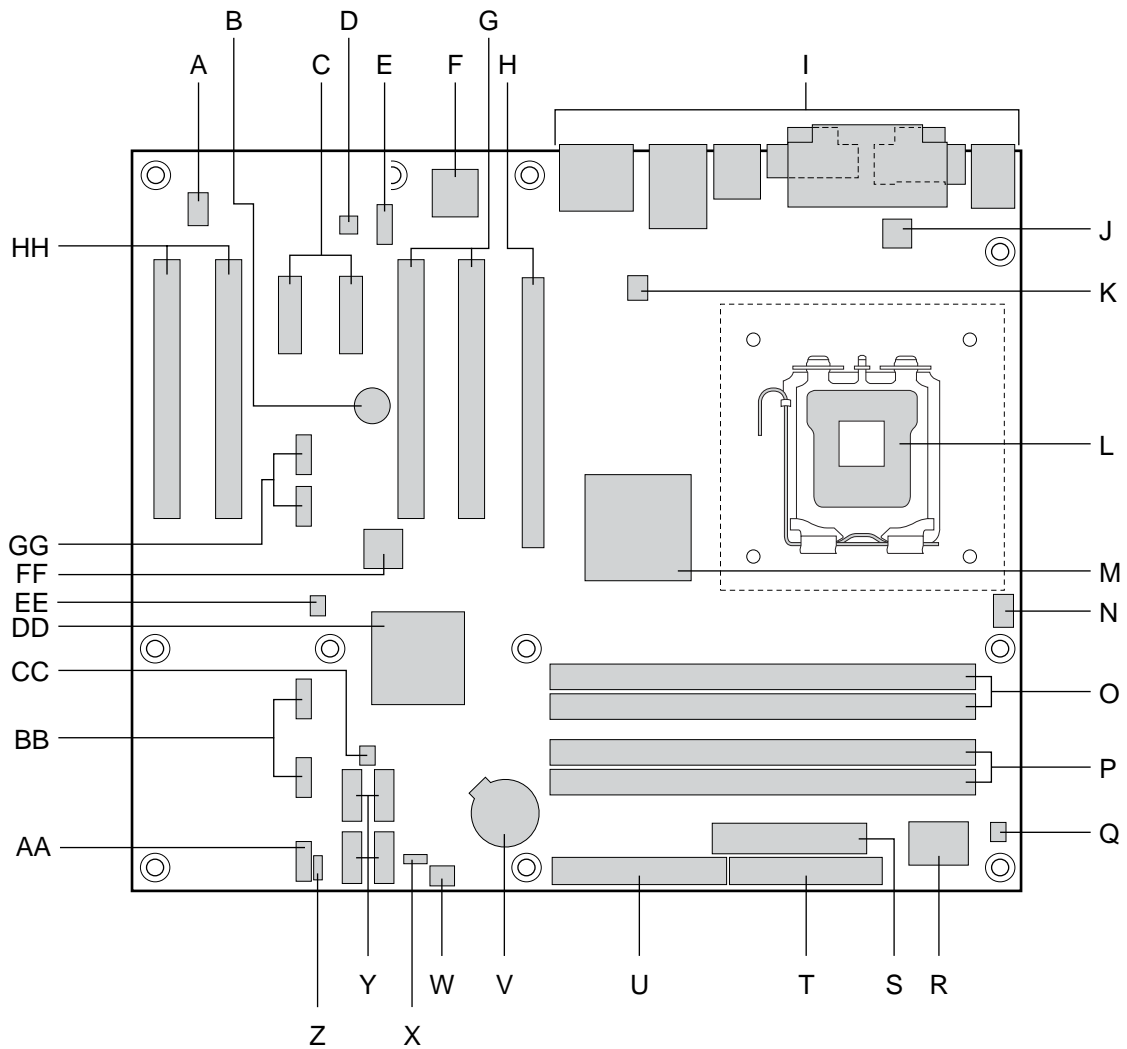

OM17738

Figure 1. Board Components

Table 3 lists the components identified in Figure 1.

Table 3. Board Components Shown in Figure 1

Item/callout from Figure 1	Description
A	Auxiliary fan connector (optional)
B	Speaker
C	PCI Express x1 bus add-in card connectors [2]
D	Audio codec
E	Front panel audio connector
F	Ethernet device
G	PCI Conventional bus add-in card connectors [2]
H	PCI Express x16 bus add-in card connector
I	Back panel connectors
J	+12V power connector (ATX12V)
K	Rear chassis fan connector
L	LGA775 processor socket
M	Intel 82945G GMCH
N	Processor fan connector
O	DIMM Channel A sockets [2]
P	DIMM Channel B sockets [2]
Q	SCSI LED connector (optional)
R	Legacy I/O controller
S	Power connector
T	Diskette drive connector
U	Parallel ATE IDE connector
V	Battery
W	Front chassis fan connector
X	BIOS Setup configuration jumper block
Y	Serial ATA connectors [4]
Z	Auxiliary front panel power LED connector
AA	Front panel connector
BB	Front panel USB connectors [2]
CC	Chassis intrusion connector
DD	Intel 82801G I/O Controller Hub (ICH7)
EE	SPI flash device
FF	IEEE-1394a controller (optional)
GG	Front panel IEEE-1394a connectors (optional) [2]
HH	PCI Conventional bus add-in card connectors [2]

